

APPENDIX F

Awning Removal Procedure

Helper needed

Tools needed: ½" socket or wrench, 7/16" socket or wrench, ladders, (2) plastic safety sleeves

WARNING: FAILURE TO FOLLOW THESE INSTRUCTIONS COULD RESULT IN PERSONAL INJURY!

1. Close your Awning completely.
2. Unplug your Awning motor cord, if equipped.
3. Install your Plastic Safety Sleeves on both Lateral Arms to prevent them from extending. See **Figure 23**. If you do not have the Safety Sleeves that were supplied with your Awning, call **800-670-7071** for replacement Safety Sleeves that will be supplied free of charge.

WARNING: DO NOT ATTEMPT TO REMOVE THE AWNING WITHOUT INSTALLING THE PLASTIC SAFETY SLEEVES ON BOTH LATERAL ARMS.

4. Using a ½" socket or wrench, check that all 8 fasteners are tight, on the right and left side of the Awning (Arm Clamps - 2 each, Roller Brackets - 1 each, and Front Bar Connectors- 1 each). See **Figure 24**.
5. For Motorized Awnings- Using a 7/16" socket or wrench, check that the 2 bolts that secure the Motor to the Roller Bracket are tight. See **Figure 24**.
6. While your Helper keeps the Awning in the Mounting Brackets, carefully remove the Retaining Bolts, Nuts and Washers from each Mounting Bracket (Soffit or Wall).
7. Using the appropriate help, carefully remove the Awning from the Mounting Brackets and place on a stable surface.

CAUTION: Be careful not to drag the Awning on any surface as you can damage the Fabric or painted surfaces.

Figure 23

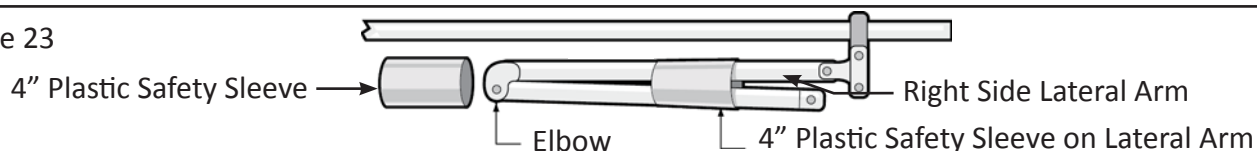


Figure 24

