




For Technical Support visit us at www.sunsetter.com/ownerscorner
or Call Toll Free 800-670-7071 • Fax 877-224-4944

Lift Handle Replacement- Model 900XT & 1000XT

Tools Needed: Small nail or punch, flat screwdriver, hammer.

Parts Supplied: Lift Handle & Drive Rivets ($\frac{1}{8}$ " diameter x .28 length)

WARNING: FAILURE TO FOLLOW THESE INSTRUCTIONS CAN RESULT IN PERSONAL INJURY!! PLEASE READ THESE INSTRUCTIONS IN ITS ENTIRETY BEFORE ATTEMPTING TO COMPLETE THIS PROCESS.

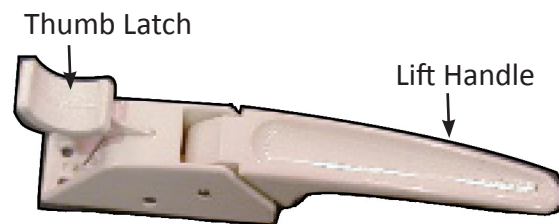

Note: Drive Rivets Not Shown

Note: Left and Right references are as you face the house.

1. Using the Hand Crank, unroll the Awning approximately 6-12" from the house.
2. On the side needing replacement, unlatch the bottom of the Arm from the Wall Bracket on the house.
3. Swing the Arm away from the house. Operate the Lift Handle and slide the Inner Arm out of the Outer Arm.
4. Raise the Lift Handle and press the Thumb Latch to gain access to the Drive Rivets that secure the Lift Handle.
5. Using a small nail or punch, drive the centers of the rivets all the way through the Arm.
6. Pry the rivets out of the holes with a flat screwdriver and remove the Lift Handle.
7. Place the new Lift Handle in the opening on the Outer Arm and insert the new drive Rivets in the holes.
8. Using a hammer and punch, drive the pins flat with the head of the Rivets.
9. Operate the Lift Handle and slide the Inner Arm back into the Outer Arm until it stops on the Acorn Nut.
10. Swing the Arm back towards the house and latch the bottom of the Arm into the Wall Bracket.
11. Test the Awning for proper operation.