



RETRACTABLE AWNINGS

For Technical support visit us at www.sunsetter.com/ownerscorner
or call Toll Free 800-670-7071 • Fax 877-224-4944

Patio Lights for OASIS Awning Installation Instructions

Parts Enclosed: Patio Light Assembly, (6) Globes, (8) Attachment strap assemblies for Patio Lights, (6) Light hooks
Additional Parts Supplied with Patio Lights p/n 80046: Cord Cover 37" long (2), Velcro Straps (4).

NOTE: THE STEPS BELOW DESCRIBE HOW TO SETUP THE PATIO LIGHTS FOR USE WITH A SUNSETTER AWNING. THE PATIO LIGHTS CAN ALSO BE ATTACHED TO ANY OTHER TYPE OF STRUCTURE USING THE HOOKS AT THE TOP OF EACH GLOBE HOUSING.


CAUTION: FAILURE TO WEAR SAFETY GLASSES OR TO FOLLOW THE INSTRUCTIONS BELOW CAN RESULT IN PERSONAL INJURY!

STEP 1.

Open the awning as you normally would.


STEP 2.

Locate the (6) Patio Light hooks and install hand tight on top of each light assembly. (see Figure 1)

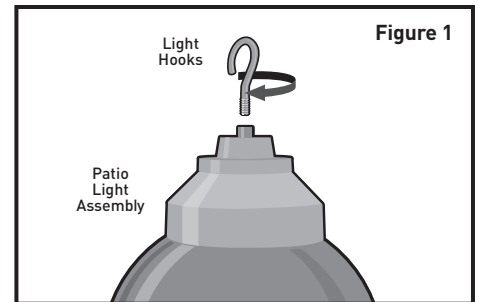


STEP 3.

Install a standard light bulb (40 watt maximum) in each of the six sockets. Locate the globes and screw them into the socket assemblies.

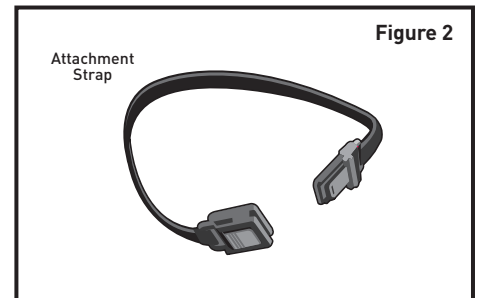

STEP 4.

In the hardware package locate the (8) eight Attachment Straps Assemblies. (see Figure 2)

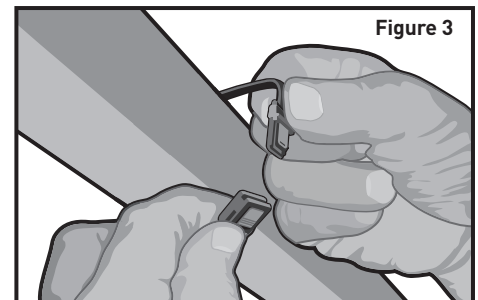


STEP 5.

Fasten (6) six Attachment Straps to the horizontal square bar of the awning. (see Figure 3)

STEP 6.

Attach the hooks on the top of each light assembly to the bottom of the Attachment Straps. (see Figure 4)

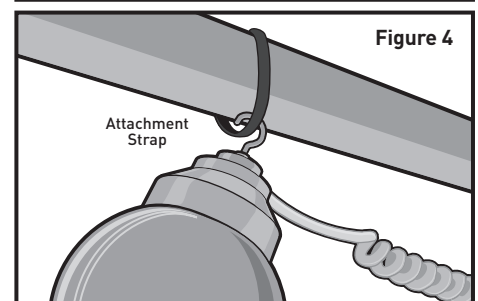

STEP 7.

Slide the Attachment Straps to adjust the spacing between the SunSetter Patio Lights.

STEP 8.



Locate the cord cover and position over the electrical cord(s) and flat against the inside of the square bar upright. (see Figure 5)

STEP 9.

Using the Velcro Straps, secure the cord cover in place. (see Figure 6)

STEP 10. CONNECT YOUR SUNSETTER PATIO LIGHTS TO A GROUND FAULT CIRCUIT INTERRUPTER PROTECTED RECEPTACLE ONLY. DO NOT PLACE WITHIN (16) FEET OF A POOL.

WARNING: FAILURE TO PLUG THE ELECTRIC CORD INTO A GROUND FAULT INTERRUPTER (GFI) OUTLET CAN RESULT IN PERSONAL INJURY.

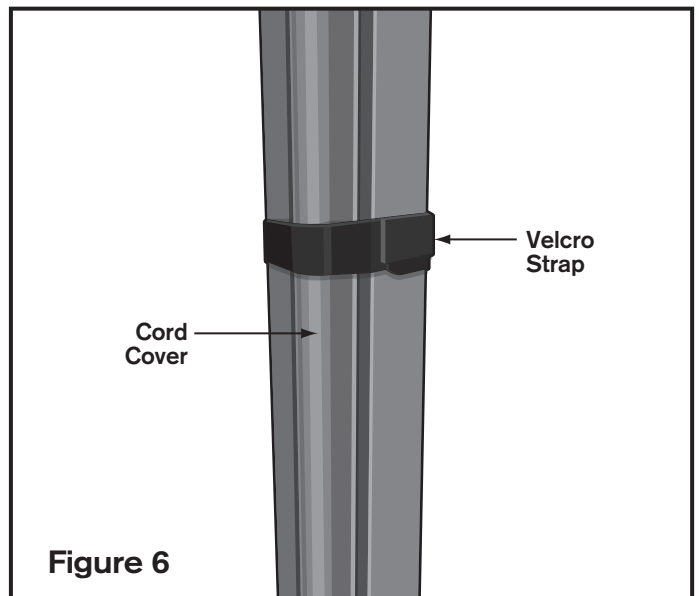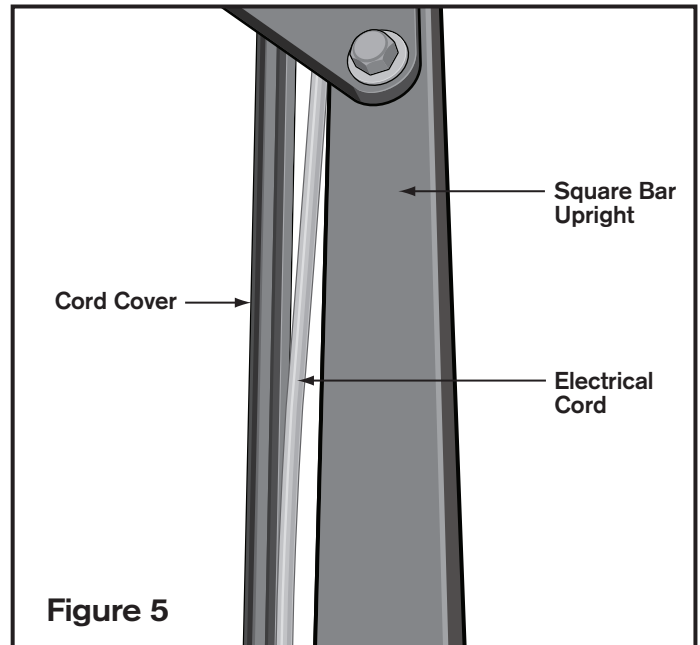

IMPORTANT SAFETY INSTRUCTIONS:

This lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electrical shock. This plug will fit in a polarized outlet only one way. If the plug does not fit into the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use an extension cord unless the plug can be fully inserted. DO NOT ALTER THE PLUG.