



For Technical Support visit us at support.sunsetter.com,
email contactus@sunsetter.com, or Call Toll Free 800-670-7071

Manual Override Crank Replacement

Sunea Awning Motor

WARNINGS:

- **FAILURE TO FOLLOW THESE INSTRUCTIONS CAN RESULT IN PERSONAL INJURY! PLEASE READ THESE INSTRUCTIONS IN ITS ENTIRETY BEFORE ATTEMPTING TO COMPLETE THIS PROCESS.**
- **BE SURE THAT NO OBJECT OR PERSONS CAN COME IN CONTACT WITH THE AWNING AS IT CLOSES OR OPENS**

Tools Needed: Helper, 2 Ladders, 3mm Allen Wrench


Parts Supplied: Override Crank, 3 mm Allen Cap Bolt, Washer



Prepare Awning


1. Open the awning to the fully extended position.
2. Unplug awning.

Note: For awnings that have a SunSetter Aluminum Hood installed, remove the Hood End Plate on the same side as the Motor. See Figure 2.

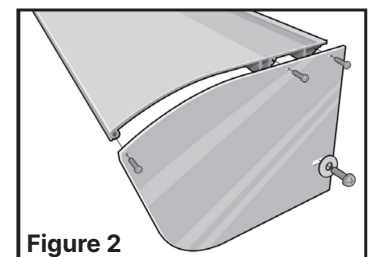

Remove Damaged Override Crank

- Using a 3 mm Allen wrench, remove damaged Override Crank from Motor. See **Figure 3**

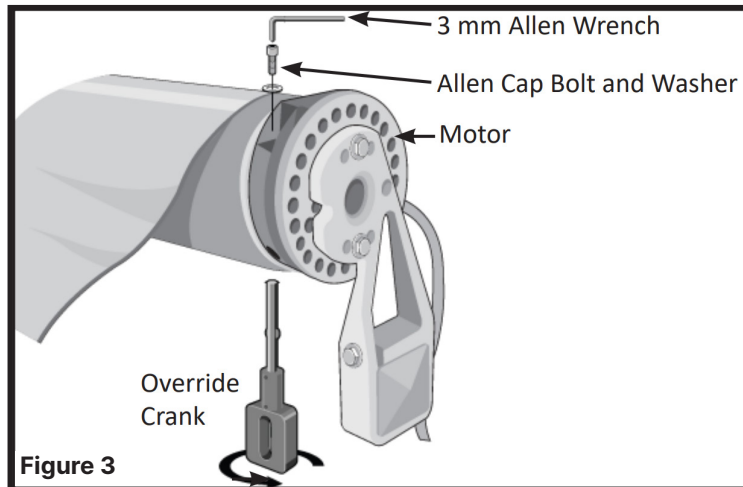

Install New Override Crank

- Insert new Override Crank from bottom of Motor so the Override Crank loop faces downward. Secure the Override Crank, from the top, with supplied Allen Cap Bolt and Washer. See **Figure 3**

Note: Reinstall the Hood End Plate, if removed.

Test For Proper Operation

- Use the manual Crank Wand to fully close the awning.
- Plug awning back in.
- Test awning for proper operation.

Thank you for choosing SunSetter