

Platinum Plus Semi-Cassette Awning Parts Diagram


Figure 1



Note: This figure shows Awning with Motor installed on the right side as you face the house.

Note: Number of Brackets supplied with the Awning will vary (minimum of 4, maximum of 6) depending on Awning size. See Parts List on page 4.

① Awning Left End

③ Awning Middle Point

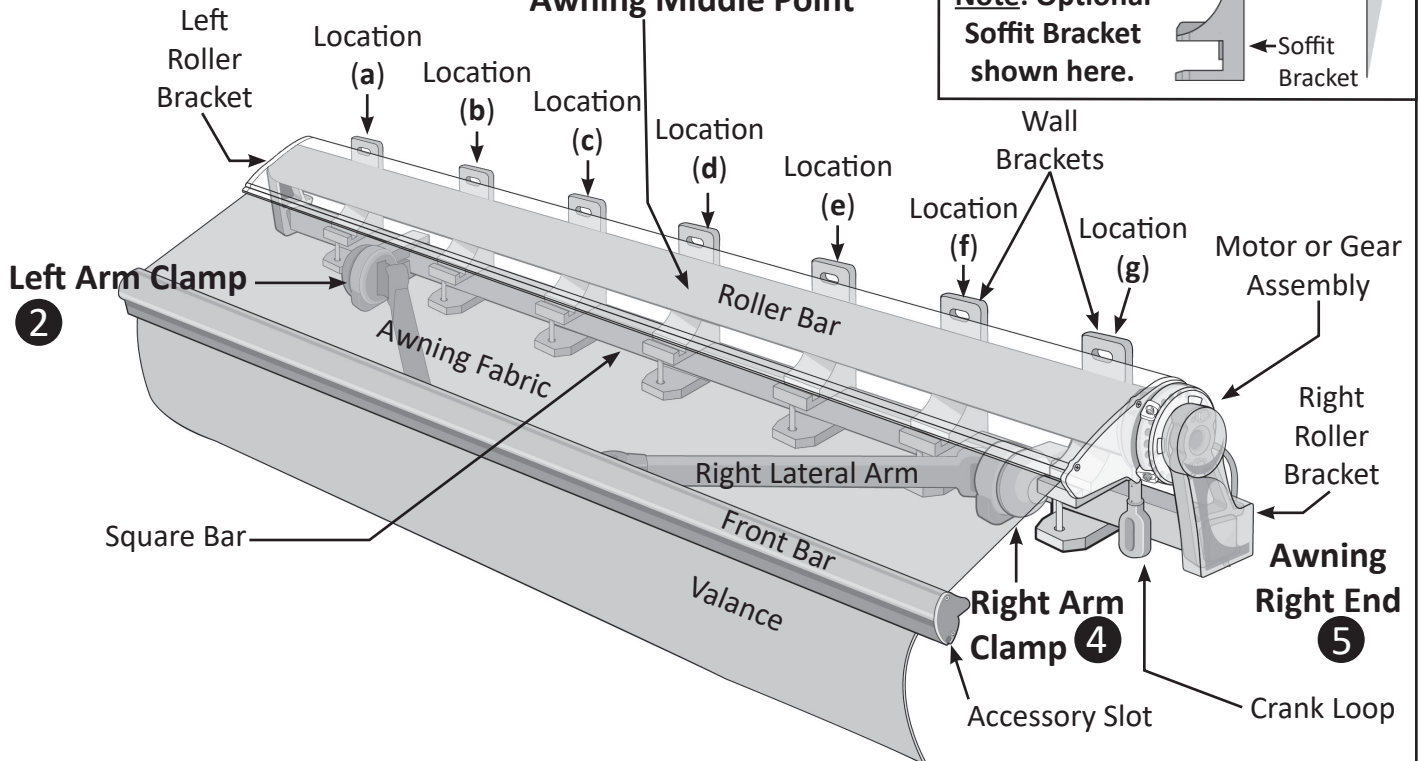

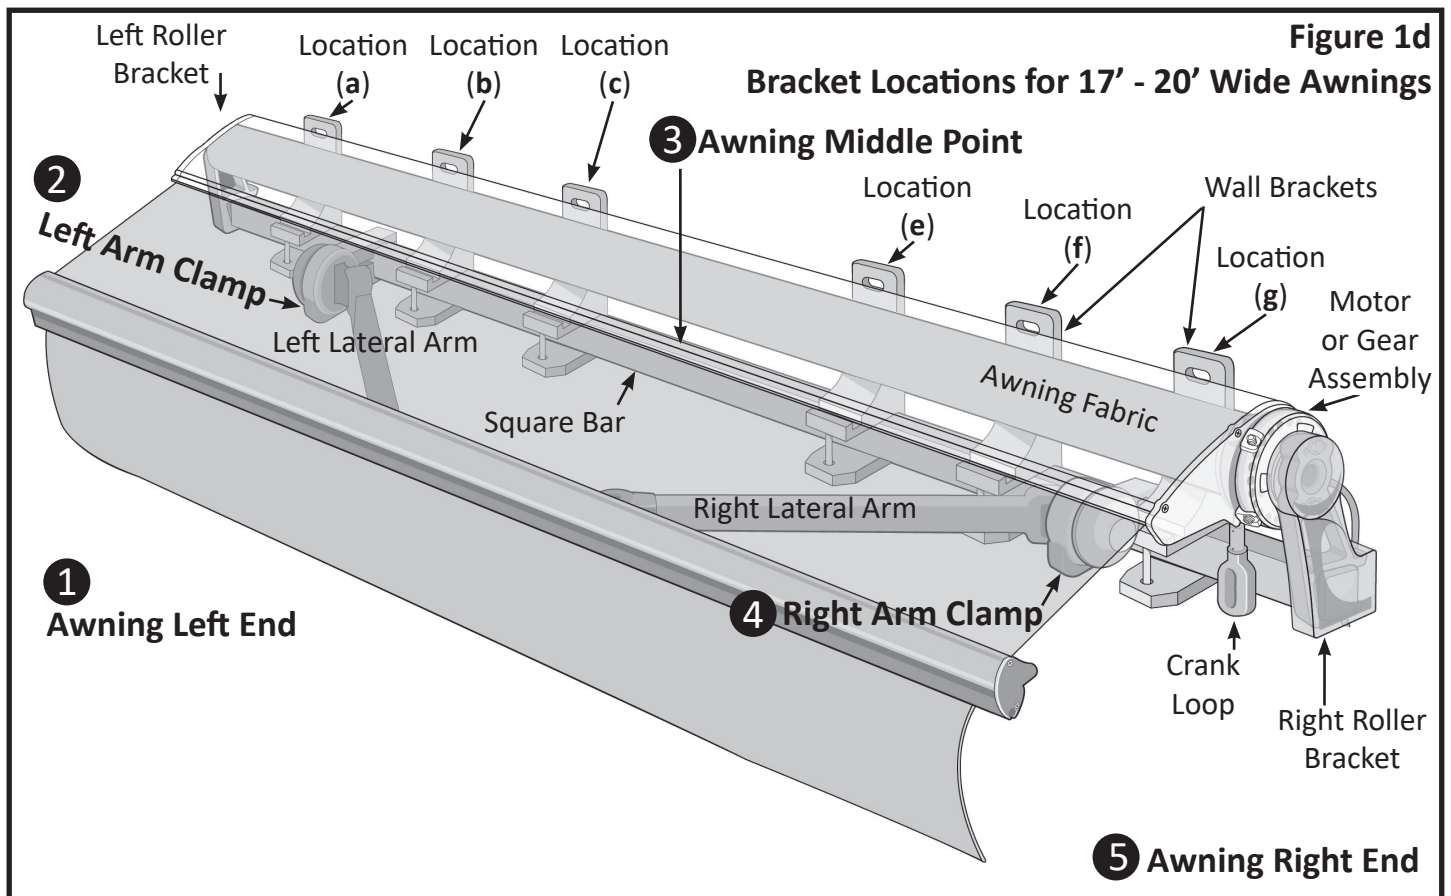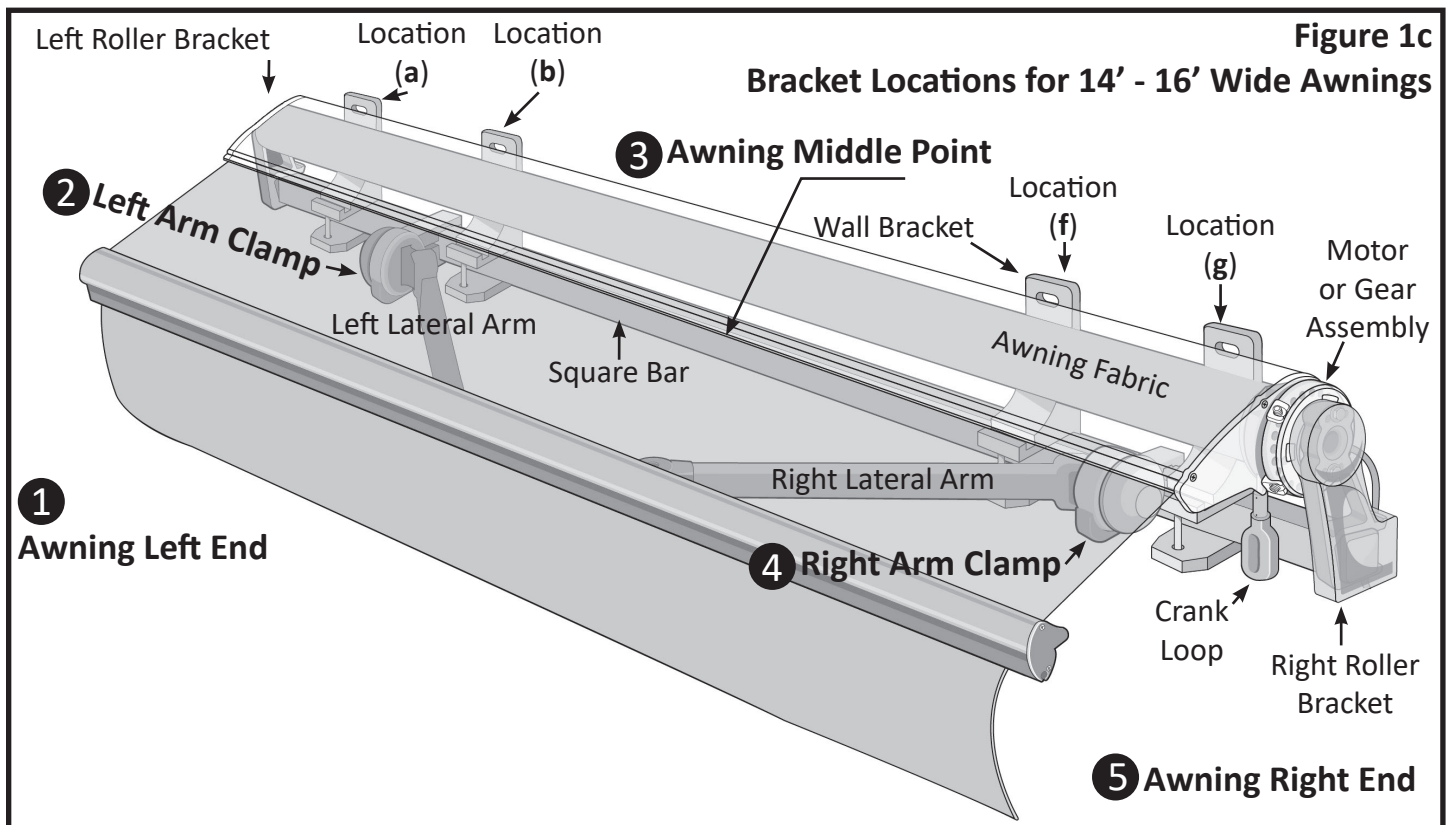


Supplied Fasteners / Parts List

Note: All Awnings ship with one of the following types of Brackets and Mounting Hardware:

Wall Bracket

14' - 16' : Qty 4

17' - 20' : Qty 6

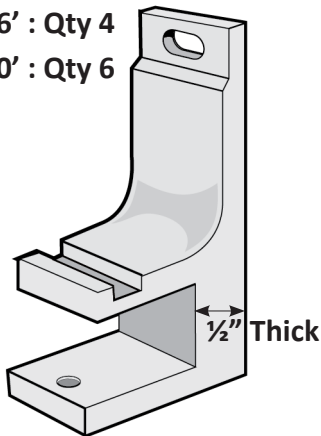


Mounting Hardware Includes:

- Two 4" Lag Screws and Flat Washers for each Wall Bracket
- One Retaining Bolt Set for each Wall Bracket

XL Extended Projection Wall Bracket

14' - 16' : Qty 4

17' - 20' : Qty 6

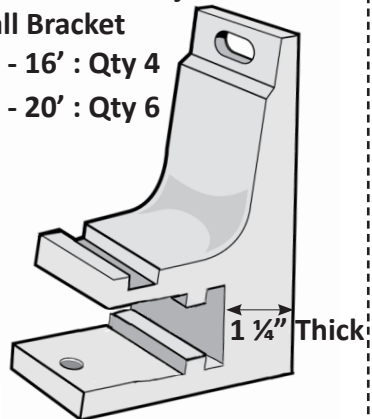


Mounting Hardware Includes:

- One 4" Lag Screw and Flat Washer for each Wall Bracket
(use 4" Lag Screw in top Bracket hole)
- One 5" Lag Screw and Flat Washer for each Wall Bracket
(use 5" Lag Screw in bottom Bracket hole)
- One Retaining Bolt Set for each Wall Bracket

Soffit Bracket

14' - 16' : Qty 4

17' - 20' : Qty 6

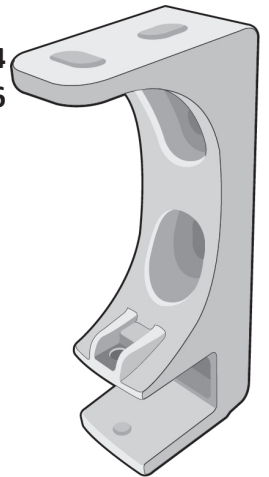

Mounting Hardware Includes:

- Two 4" Lag Screws and Flat Washers for each Soffit Bracket
- One Retaining Bolt Set for each Soffit Bracket

Lag Screws and Flat Washers

$\frac{3}{8}$ " Flat Washer


14'-16': Qty 8

17'-20': Qty 12

$\frac{3}{8}$ " x 4" Lag Screw (for all Brackets)

(Note: For Extended Projection Wall Bracket, half the number of 4" Lag Screws are replaced with 5" Lag Screws, as shown below.)

14'-16': Qty 8, 17'-20': Qty 12

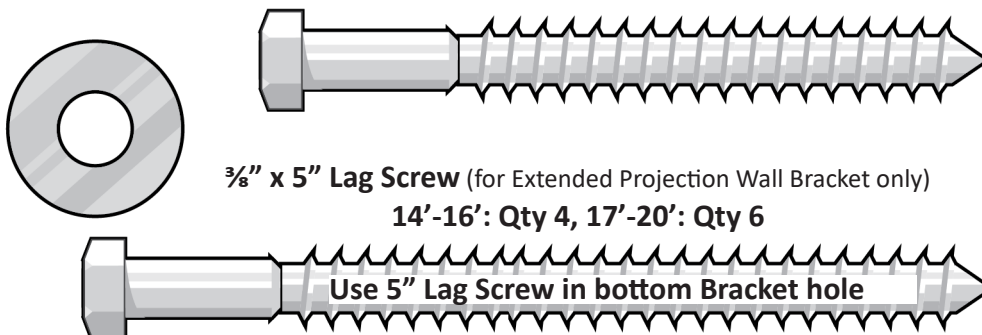

$\frac{3}{8}$ " x 5" Lag Screw (for Extended Projection Wall Bracket only)

14'-16': Qty 4, 17'-20': Qty 6

Retaining Bolt Set

14' - 16': Qty 4



17'-20': Qty 6

$\frac{5}{16}$ " x 2- $\frac{3}{4}$ "
Retaining Hex Bolt

$\frac{5}{16}$ " Retaining Nut



$\frac{5}{16}$ " Flat Washer




6 mm Allen Wrench
Qty 1

Crank Wand
Qty 1

Additional Parts Supplied


MultiChannel Remote Transmitter, Qty 1

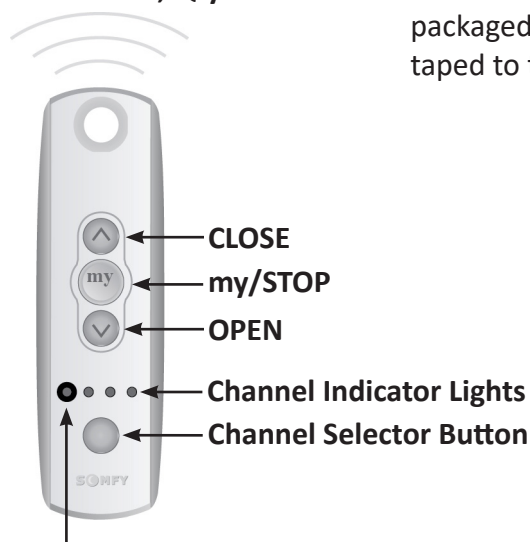

A Spare CR2430 Lithium Battery for the Remote Transmitter is packaged in the clear bubble pack taped to the Motor Power Cord.



Wall Mount for Remote Transmitter, Qty 1

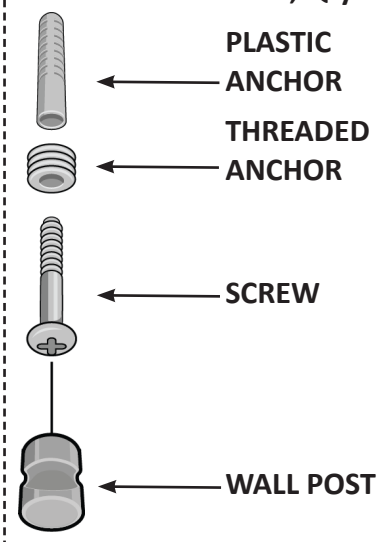

Note: Awning is preset to operate on Channel 1.

- Check the active Channel by briefly pressing the Channel Selector Button. The active Channel Light will blink.
- Change Channel by pressing the Channel Selector Button.
- Press the Channel Selector Button again while the Channel Indicator Light blinks and the next Channel will be selected.

Optional Parts List - Masonry, Brick or Concrete Installations (available for all models)

$\frac{3}{8}$ " x 6" Masonry Drill Bit, Qty 1 (For Masonry Walls)



$\frac{3}{8}$ " x 4" Masonry Bolt (For Masonry Walls)

14' - 16' Awning = Qty 8
17' - 20' Awning = Qty 12



Use 5" Masonry Bolt in bottom XL Extended Projection Bracket hole

$\frac{3}{8}$ " x 5" Masonry Bolt (For Masonry Walls)

Note:

For XL Extended Projection Awnings, substitute half of the 4" Masonry Bolts with 5" Masonry Bolts

Other Optional Items Packaged in the Same Tube with your Awning (if purchased with your Awning)

a. Wireless Wind Sensor

b. Wireless Wall Switch

c. All-Weather Remote